



 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY




# Datasheet

## ADVANTECH

### ASMB-787

Industrial ATX Server Motherboard for 10th Gen. Core™ & Xeon® Processors  
with Intel® W480E Chipset

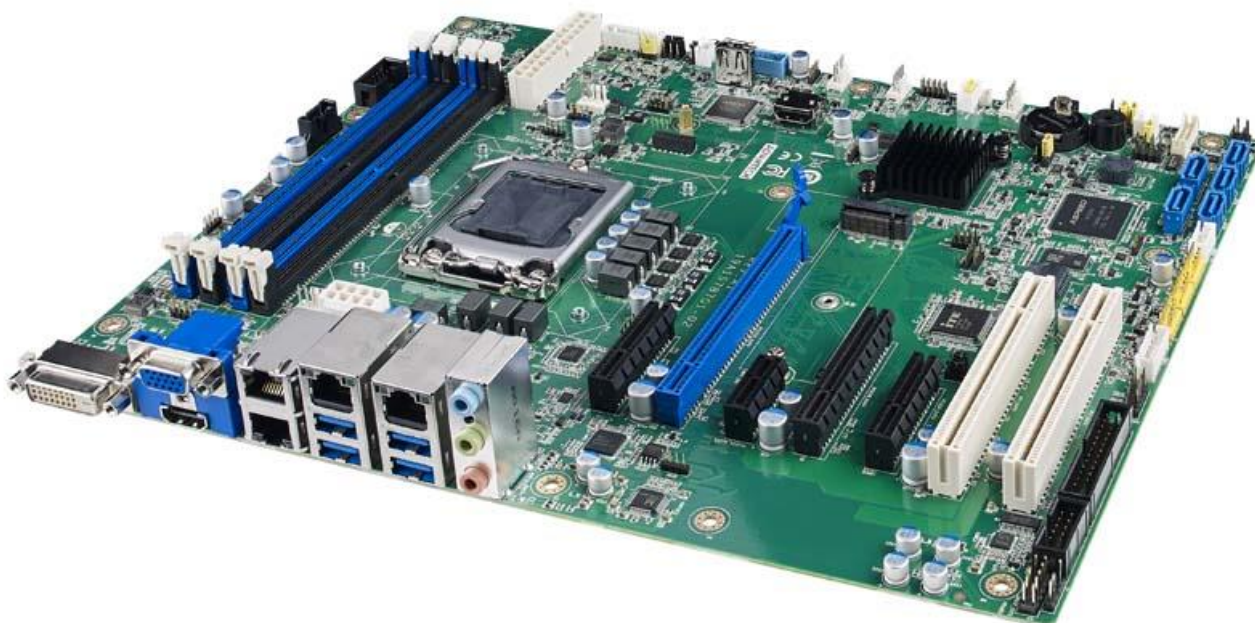

---


The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

# ASMB-787

**LGA 1200 Intel® Xeon® W & 10th Gen. Core™ ATX Server Board with 4 x DDR4, 5 x PCIe, 2 x PCI, 4 x USB 3.2, 5 x SATA 3, Quad/Dual LANs, and IPMI**

**NEW**

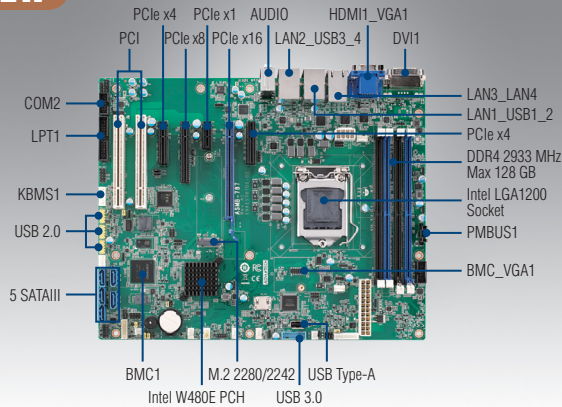

## Features

- LGA 1200 Intel® Xeon® W & 10th Gen. Core™ i9/i7/i5/i3 processors with W480E chipset
- DDR4 2933/2666/2400 MHz ECC/Non-ECC UDIMM up to 128 GB
- One PCIe x16 link (or two x8 link), two PCIe x4, and one PCIe x1 slots
- Triple displays - DVI-D, VGA, and HDMI 2.0 ports
- Five SATA 3 ports and four x USB 3.2 ports
- One M.2 2280/2242 (SATA / PCIe compatible)
- Rackmount optimized placement with positive air flow design
- 0 ~ 60 °C (32 ~ 140 °F) ambient operating temperature range

Note: Supported OS including Windows 10 (64-bit) and Server 2019 (64-bit) have been validated.

CE FCC


## Specifications

Form Factor		ATX form factor						
Processor System	Socket	Intel® LGA 1200						
	CPU type	Intel® Xeon® W-1270x/W-1290x and 10th Generation Core™ i3/i5/i7/i9 series (TDP up to 125W)						
Core Logic	Chipset	Intel W480E chipset						
Memory	Total slots	4 x (Dual Channel)						
	Max. capacity	128 GB						
	Memory type	DDR4 ECC/Non-ECC 2933/2666/2400 MHz UDIMM (288-pin)*						
	Memory size	4 GB, 8 GB, 16 GB, 32GB						
Expansion Slots	Total PCI/PCIe slots	7						
	Slot location 1	PCI slot						
	Slot location 2	PCI slot						
	Slot location 3	PCIe x4 slot (Gen3 x4 link)						
	Slot location 4	PCIe x8 slot (Gen3 x8 link)						
	Slot location 5	PCIe x1						
	Slot location 6	PCIe x16 slot (Gen3 x8 or x16 link)						
Graphics	Slot location 7	PCIe x4 slot (Gen3 x4 link)						
	Controller	Intel® HD Graphics**						
Storage	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed						
	SATA controller	Intel® W480E: 8 SATA 3 6 Gb/s ports with Intel Rapid Storage Technology support (for Windows only) (Supports software RAID 0, 1, 10 & 5)						
Networking	SAS controller	-						
	Interface	10/100/1000 Mbps						
Onboard I/O Connector	Controller	GbE LAN1: Intel® I219; GbE LAN 2-4: Intel I210-AT						
	Connector	RJ-45 x 2 for G2 version; RJ-45 x 4 for G4 version						
	Printer Port connector	1						
	PSU connector	24-pin SSI power connector + 8-pin SSI 12V power connector						
	USB connector	1 x USB 3.2 Gen 1 (2 ports), 3 x USB 2.0 (6 ports), 1 x USB Type-A						
	M.2 connector	1 x M.2 2280/2242 (PCIe/SATA)						
	Fan header	5 x (4-pin)						
	SMBus	1						
	Chassis intruder	1						
	Front LAN LED	2						
Rear I/O Connector	Serial port header	2 x (RS-232)						
	Audio connector	1 x (ALC 892)						
	PS/2 KB/Mouse	1 x (Optional PS/2 KB/Mouse cable and bracket required)						
	External serial port	- (via COM cable in the package)						
	External USB port	4 x (USB 3.2 Gen 2)						
	VGA port	1 x (Resolution up to 1920 x 1200 @ 60 Hz)						
	DVI port	1 x (Resolution up to 1920 x 1200 @ 60 Hz)						
	HDMI port	1 x (Resolution up to 4096 x 2160 @ 60 Hz)						
RJ-45	2 x for G2 version; 4 for G4 version							
Watchdog Timer	Audio connector	2 x (Mic-in, Line-out)						
	PS/2 KB/Mouse	-						
Power Requirement	Output	System reset						
	Interval	Programmable 1 ~ 255 sec						
	Power On	3.3 V	5 V	12 V	12V_8P	5 V <sub>SB</sub>	-12 V	
	(Xeon W-1290E 3.5GHz DDR4 2666 32G*4)	1.69A	1.68A	0.31A	9.25A	0.1A	0.01A	
	Environment	Operating					Non-operating	
		Temperature	0 ~ 60° C, depends on CPU speed and cooler solution				-40 ~ 85° C	
	Physical Characteristics	Humidity	0% ~ 95%				5% ~ 95% (Non condensing)	
Dimensions		304.8 x 244 mm (12 x 9.6 in)						

\* ECC will not be supported when paired with Core i5/i7/i9 processors.

\*\* Some Xeon processors have no graphic support. Please check Intel specification for processor graphics availability.

### Block Diagram

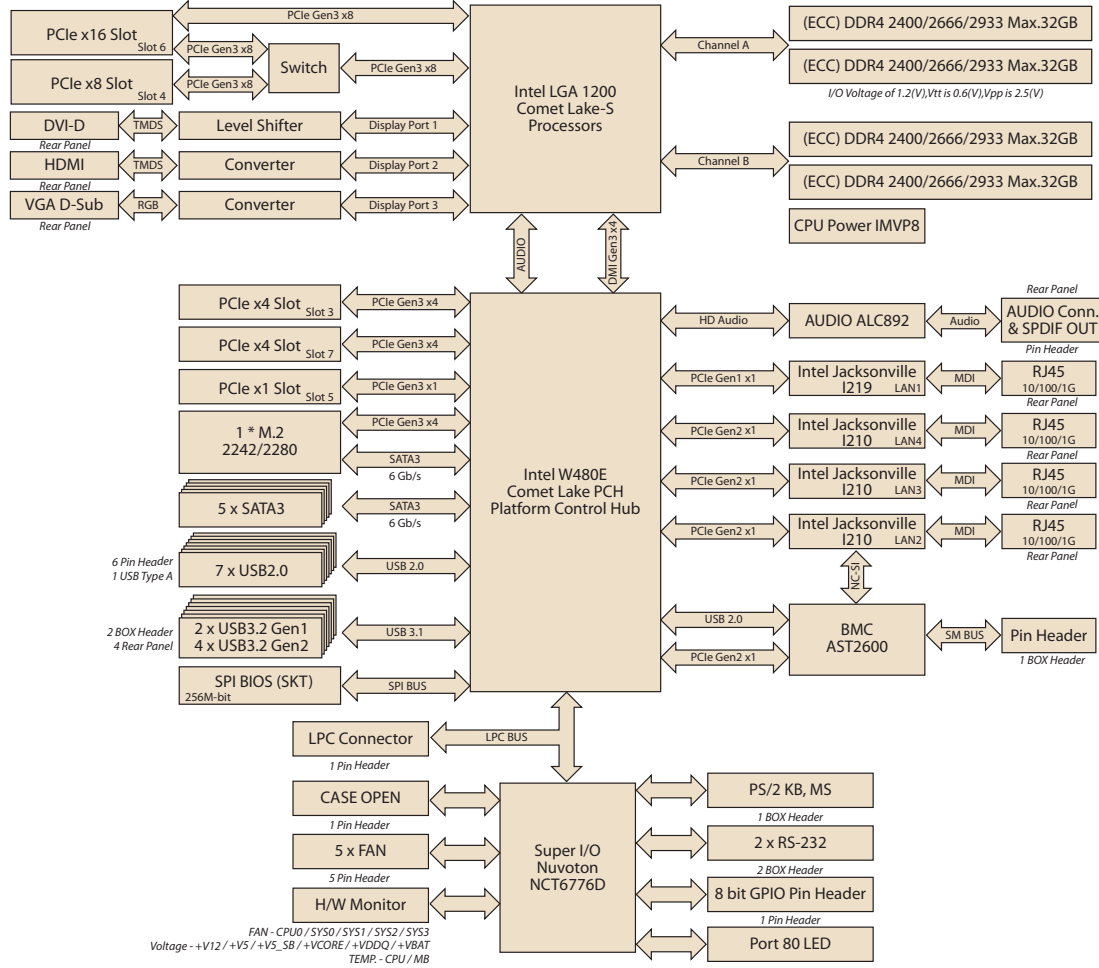

### Ordering Information

Part Number	Chipset	Memory	Display	LAN	SATAIII	IPMI
ASMB-787G2-00A1	W480E	DDR4 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	2	5	-
ASMB-787G4-00A1 (Available in Q2/2021)	W480E	DDR4 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	4	5	Y

### Packing List

Part Number	Description	Quantity
2041B78700	Startup manual	x 1
1700003194	SATA data cables	x 1
1700019381	SATA data cable (right angle)	x 1
1700022749-11	SATA power cables	x 2
1700001788	COM1 cable	x 1
1960088021T001	I/O shield	x 1
1700031684-01	JFP1 cable	x 1

### I/O View



ASMB-787G4-00A1



ASMB-787G2-00A1

### Optional Accessories

Part Number	Description
1700029038-01	BMC VGA cable with bracket (35 cm / 13.7 in, for G4 SKU)

Note: If you need BMC KVM function, please select this cable.

Part Number	Description
1960049408N001	LGA 1200 CPU heatsink for 1U chassis
1960067860N001	LGA 1200 CPU cooler for 2U/4U chassis (CPU 125W)
1960052651N021	LGA 1200 CPU cooler for 2U/4U chassis (CPU under 95W)
1960088060T001	1U I/O shield for ASMB-586/587/786/787
1700008809	Printer port cable kit (25 cm / 9.84 in)
1700020294-01	Printer port cable kit (42 cm / 16.5 in)
1701090401	Single port RS-232 cable with bracket (40 cm / 15.7 in)
1700002204	Dual port USB 2.0 cable (27 cm / 10.6 in) with bracket
1700008461	Four port USB 2.0 cable (30.5 cm / 12 in) with bracket
1700020277-01	Dual port USB 3.0 cable with bracket (30 cm / 11.8 in)
1700019268-11	Cable for onboard KBMS1 connector (35 cm / 13.7 in)
1960063434N000	Cable bracket for 1700019268-11 (4U)
PCA-COM232-00A1E	4 ports RS-232 module to LPC connector
PCA-COM485-00A1E	4 ports RS-485 module to LPC connector
PCA-TPM-00B1E	TPM 2.0 Module by LPC

Note: Users need to purchase ASMB-787's proprietary CPU cooler from Advantech Other brands' CPU coolers may NOT be compatible with ASMB-787.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



#### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecaq.de](mailto:info@fortecaq.de)  
Internet: [www.fortecaq.de](http://www.fortecaq.de)

## Fortec Group Members

### Austria



#### Distec GmbH Office Vienna

Nuschinggasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



#### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



#### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



#### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hichingbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



#### Apollo Display Technologies, Corp.

87 Raynor Avenue,  
Unit 1 Ronkonkoma,  
NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)