



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

ADVANTECH

ASMB-788

Industrial ATX Motherboard for Intel® 12th Gen. Core™ i9/i7/i5/i3 processors with W680
Chipset




The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

ASMB-788

LGA 1700 Intel® 12th Gen. Core™ ATX Server Board with 4 x DDR5, 5 x PCIe (1 x Gen 5, 3 x Gen 4, 1x Gen 3), 7 x USB 3.2, 4 x SATA3, Quad/Dual LANs, and IPMI

NEW

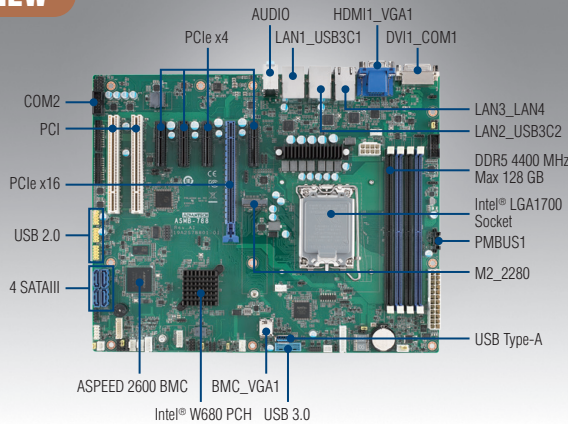

CE FCC

Features


- LGA 1700 Intel® 12th Gen. Core™ i9/i7/i5/i3 processors with W680 chipset
- DDR5 ECC/Non-ECC 4400/4000/3600 MHz UDIMM up to 128 GB
- One PCIe x16 (Gen 5) and four PCIe x4 (3 x Gen 4 & 1 x Gen 3) slots
- Triple displays - DVI-D, VGA, and HDMI 2.0 ports
- Four SATA 3 ports and seven USB 3.2 ports
- One M.2 2280 (PCIe x4)
- Rackmount optimized placement with positive air flow design
- 0 ~ 60 °C (32 ~ 140 °F) ambient operating temperature range

Specifications

Form Factor		ATX form factor				
Processor System	Socket	Intel® LGA 1700				
	CPU type	12th Gen Intel® Core™ i9/i7/i5/i3 series processors (TDP up to 125W)				
Core Logic	Chipset	Intel® W680 chipset				
Memory	Total slots	4 x (Dual Channel)				
	Max. capacity	128 GB				
	Memory type	DDR5 ECC/Non-ECC 4400/4000/3600 MHz UDIMM (288-pin)*				
	Memory size	8 GB, 16 GB, 32 GB				
Expansion Slots	Total PCI/PCIe slots	7				
	Slot location 1	PCI slot				
	Slot location 2	PCI slot				
	Slot location 3	PCIe x4 slot (Gen 4 x4 link)				
	Slot location 4	PCIe x4 slot (Gen 3 x4 link)				
	Slot location 5	PCIe x4 slot (Gen 4 x4 link)				
	Slot location 6	PCIe x16 slot (Gen 5 x16 link)				
Graphics	Slot location 7	PCIe x4 slot (Gen 4 x4 link)				
	Controller	Intel® HD Graphics				
Storage	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed				
	SATA controller	Intel® W680: 4 SATA3 6 Gb/s ports with Intel Rapid Storage Technology support (for Windows only) (Supports software RAID 0, 1, 10, & 5)				
Networking	SAS controller	-				
	Interface	10/100/1000 Mbps				
Onboard I/O Connector	Controller	GbE LAN1: Intel® I219; GbE LAN 2-4: Intel® I210-AT				
	Connector	RJ-45 x 2 for G2 version; RJ-45 x 4 for G4 version				
	Printer Port connector	-				
	PSU connector	24-pin SSI power connector + 8-pin SSI 12V power connector				
	USB connector	9, 1 x USB 3.2 Gen 1 (2 ports), 3 x USB 2.0 (6 ports), 1 x USB 3.2 Gen 1 Type-A				
	M.2 connector	1 x M.2 2280 (PCIe)				
	Fan header	5 x (4-pin)				
	SMBus	1				
	Chassis intruder	1				
	Front LAN LED	2				
Rear I/O Connector	Serial port header	5, 2 x RS-232 dual-port (4 ports), 1 x RS-232 single-port				
	Audio connector	1 x (ALC 888S)				
	PS/2 KB/Mouse	-				
	External serial port	1 (via COM cable in the package)				
	External USB port	4 x (USB 3.2 Gen 2)				
	VGA port	1 x (Resolution up to 1920 x 1200 @ 60 Hz)				
	DVI port	1 x (Resolution up to 1920 x 1200 @ 60 Hz)				
HDMI port	1 x (Resolution up to 4096 x 2160 @ 60 Hz)					
Watchdog Timer	RJ-45	2 for G2 version; 4 for G4 version				
	Audio connector	2 x (Mic-in, Line-out)				
Power Requirement	PS/2 KB/Mouse	-				
	Output	System reset				
	Interval	Programmable 1 ~ 255 sec				
	Power On	3.3 V	5 V	12 V	12 V_8P	5 VSB
	(Core i5-12500 3.0GHz DDR5 4800 16 GB x 4)	2.05 A	1.69 A	0.36 A	13 A	0.10 A
	Environment	Operating	Non-operating			
Temperature		0 ~ 60 °C, depends on CPU speed and cooler solution	-40 ~ 85 °C			
Physical Characteristics	Humidity	40 °C @ 95% RH Non-condensing	60 °C @ 95% RH Non-condensing			
	Dimensions	304.8 x 244 mm (12 x 9.6 in)				

* ECC will not be supported when paired with Core i3 processors.

Block Diagram

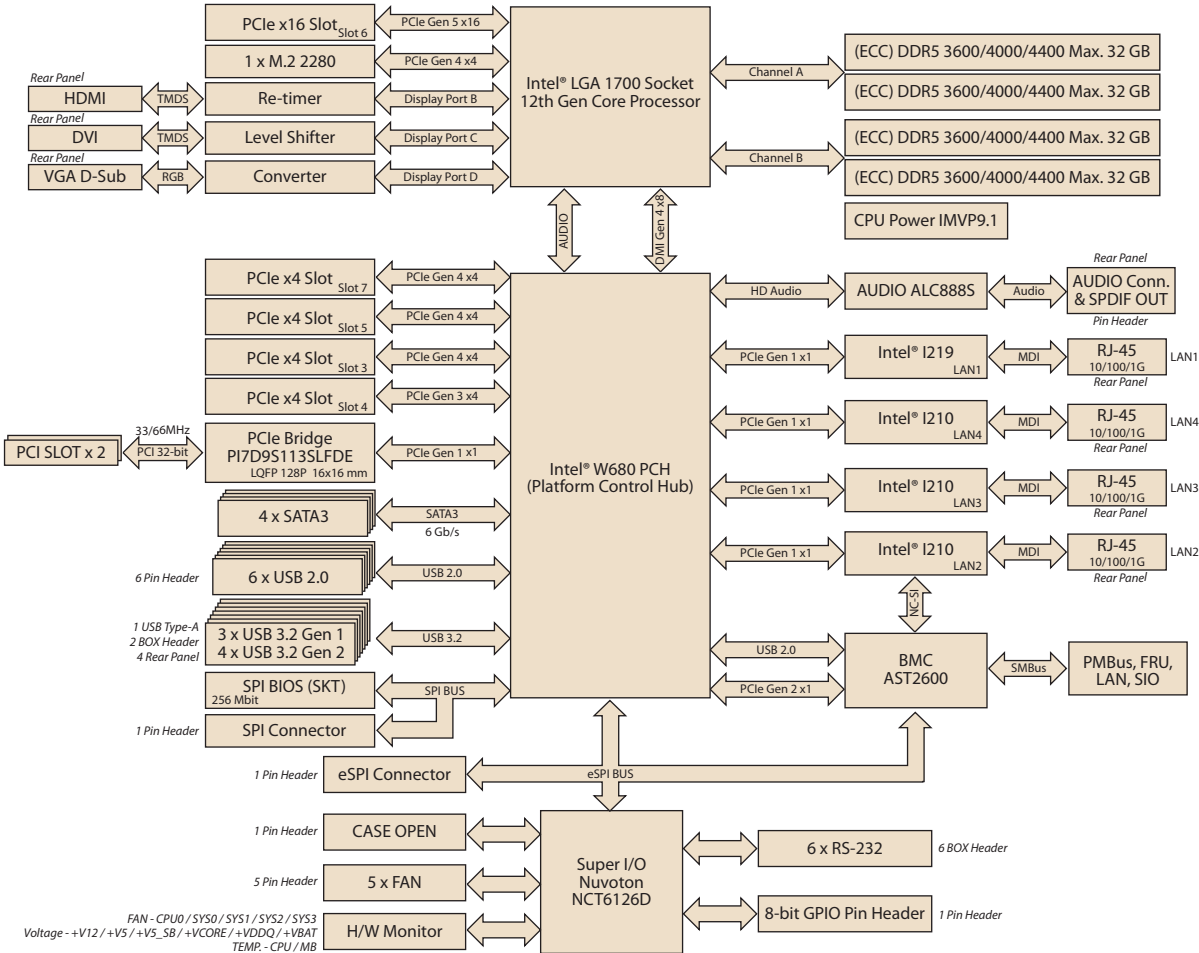

Ordering Information

Part Number	Chipset	Memory	Display	LAN	SATAIII	IPMI
ASMB-788G2-00A1	W680	DDR5 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	2	4	-
ASMB-788G4-00A1	W680	DDR5 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	4	4	Y

Packing List

Part Number	Description	Quantity
2042078800	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
1700001788	COM1 cable	x 1
1960088021T011	I/O shield	x 1
1930005673-11	Screw for M.2 device	x 1

I/O View



ASMB-788G4-00A1



ASMB-788G2-00A1

Optional Accessories

Part Number	Description
1700029038-01	BMC VGA cable with bracket (35 cm / 13.7 in, for G4 SKU)

Note: If you need BMC KVM function, please select this cable.

Part Number	Description
1970005531T001	LGA 1700 CPU heatsink for 1U chassis
1970005436T001	LGA 1700 CPU cooler for 2U/4U chassis (CPU 125W)
1970005349T000	LGA 1700 CPU cooler for 2U/4U chassis (CPU under 65W)
1960088060T011	1U I/O shield for ASMB-588/788
1700002204	Dual-port USB 2.0 cable (27 cm / 10.6 in) with bracket
1700008461	Four-port USB 2.0 cable (30.5 cm / 12 in) with bracket
1700028292-01	Dual-port USB 3.0 cable (30 cm / 11.8 in) with bracket
1700026254-01	Dual-port RS-232 cable (45 cm / 17.7 in) with bracket
PCA-TPMSPI-00A1	TPM 2.0 Module by SPI
1700031926-11	JFP1 cable for 1U chassis

Note: Users need to purchase the ASMB-788 proprietary CPU cooler from Advantech. Other brands of CPU cooler may NOT be compatible with ASMB-788.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecaq.de
Internet: www.fortecaq.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com