



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY




Datasheet

Congatec

conga-HPC/EVAL-Client


Evaluation Carrier Board for COM-HPC Client Type Modules



The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

Evaluation Carrier Board for COM-HPC Client Type Modules

conga-HPC/EVAL-Client

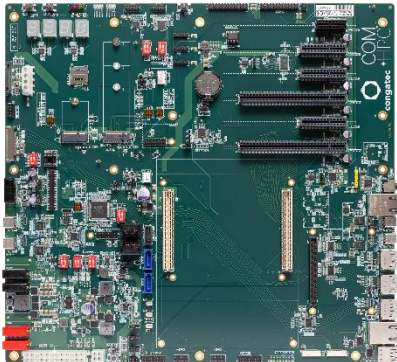

COM+HPC™

- Evaluation Carrier Board for COM-HPC Client Type Modules
- Routing of the entire signals provided by COM-HPC Module Base Specification R1.0 to standard interface connectors

| | |
|---|--|
| Formfactor | Extended ATX |
| Board Variant | Evaluation Carrier Board for COM-HPC Client Type Modules (Sizes A, B, C) |
| Internal Connectors and Features | <ul style="list-style-type: none"> 2x PCIe Gen4 x16 3x PCIe Gen4 x4 1x BMC PCIe x1 2x USB4 1x M.2 Key B 2242 (USB2, 2x PCIe) 1x M.2 Key E 2230 (USB2, 2x PCIe) 1x two-lane KR connector to connect Mezzanine Cards for LAN options 1x eDP (with option for LVDS) 1x DMIC header 1x I2S SNDW header 2x MIPI CSI 2x SATA 1x SATA Power 1x Disk Drive Power 4x COM (2x via SIO) 1x GPSPi header 1x I2C header 1x SMB header 1x GPIO header 1x Feature header 1x System Fan 1x CPU Fan |
| External Connectors | <ul style="list-style-type: none"> 1x Dual USB 2 3x DP++ 2x 10GbE RJ45 4x USB 4 1x Audio Jack 4-pin with SNDW CODEC |
| Postcode | 4x 7-Segment Postcode LEDs connected to PD I2C |
| Power Input | <ul style="list-style-type: none"> 1x ATX standard power input 24pin 1x ATX 12V power input 4pin 1x AT power input DC In 8-21Vmax (via 4x banana jacks) |
| Operating Temperature | Operating Temp.: 0°C ... +60°C Storage Temp.: -20°C ... +70°C |
| Humidity | Operating Hum.: 10% ... 90% r. H. non cond. Storage Hum.: 5% ... 95% r. H. non cond. |
| Size | 304.8 x 330.2 mm (approx. 12 x 13 inches) |
| Order Information | PN 065600 conga-HPC/EVAL-Client |

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecaq.de
Internet: www.fortecaq.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hinchingsbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com