

















## **Datasheet**

### **Ortustech**

COM35H3P44ULC

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

## Specifications for

# Blanview TFT-LCD Monitor (3.5" VGA 480 x RGB x 640 Portrait)

Version 1.0

(Please be sure to check the specifications latest version.)

#### MODEL COM35H3P44ULC

Customer's Approval
Signature:
Name:
Section:
Title:
Date:

## **ORTUSTECH**

Electronics Division Ortus Subdivision
Approved by
y. nakajima
Checked by
R. Kuronuma
Prepared by M. Slife. —
110. XINCOUNDOW

TOPPAN PRINTING CO.,LTD.

Issue:May.29,2019

Version History

Ver.	Date	Page	Description	
1.0	May.29,2019		First issue	

TOPPAN PRINTING CO.,LTD.

#### Contents

	Applica		• • • • • • • • •	4
2.	Outline	Specifications		
	2.1	Features of the Product	• • • • • • • • •	5
	2.2	Display Method	• • • • • • • • •	5
3.	Dimens	sions and Shape		
	3.1	Dimensions	• • • • • • • • •	7
	3.2	Outward Form	• • • • • • • • •	8
	3.3	Serial № print (S-print)	• • • • • • • • •	g
4.	Pin Ass	ignment	• • • • • • • • • •	10
5.	Block D	Diagram	• • • • • • • • •	11
6.	Absolut	e Maximum Rating	• • • • • • • • •	12
7.	Recom	mended Operating Conditions	• • • • • • • • •	12
	Charac			
	8.1	DC Characteristics	• • • • • • • • • • • • • • • • • • • •	13
	8.2	AC Characteristics	• • • • • • • • • • • • • • • • • • • •	14
	8.3	Input Timing Characteristics	• • • • • • • • • • • • • • • • • • • •	16
	8.4	Driving Timing Chart	• • • • • • • • • • • • • • • • • • • •	17
	8.5	Example of Driving Timing Chart	• • • • • • • • • • • • • • • • • • • •	18
9.	Power (	ON/OFF sequence	• • • • • • • • • • • • • • • • • • • •	19
10.	Charac	teristics		
	10.1	Optical Characteristics	• • • • • • • • • • • • • • • • • • • •	20
	10.2	Temperature Characteristics	• • • • • • • • •	21
11.	Criteria	of Judgment		
	11.1	Defective Display and Screen Quality	• • • • • • • • • • • • • • • • • • • •	22
	11.2	Screen and Other Appearance	• • • • • • • • • •	23
12.	Reliabil	ity Test	• • • • • • • • • • • • • • • • • • • •	24
		Specifications	• • • • • • • • • • • • • • • • • • • •	26
14.	Handlin	g Instruction		
	14.1	Cautions for Handling LCD panels	• • • • • • • • • • • • • • • • • • • •	27
	14.2	Precautions for Handling	• • • • • • • • • • • • • • • • • • • •	28
	14.3	Precautions for Operation	• • • • • • • • • • • • • • • • • • • •	28
	14.4	Storage Condition for Shipping Cartons	• • • • • • • • • • • • • • • • • • • •	29
	14.5	Precautions for Peeling off	• • • • • • • • •	30
		the Protective film		
	14.6	Warranty	•••••	30
ΑF	PPENDI	X		31

#### 1. Application

This Specification is applicable to 88.8 mm (3.5 inch) Blanview TFT-LCD monitor for non-military use.

- TOPPAN PRINTING makes no warranty or assume no liability that use of this Product and/or any information including drawings in this Specification by Purchaser is not infringing any patent or other intellectual property rights owned by third parties, and TOPPAN PRINTING shall not grant to Purchaser any right to use any patent or other intellectual property rights owned by third parties. Since this Specification contains TOPPAN PRINTING's confidential information and copy right, Purchaser shall use them with high degree of care to prevent any unauthorized use, disclosure, duplication, publication or dissemination of TOPPAN PRINTING's confidential information and copy right.
- O If Purchaser intends to use this Products for an application which requires higher level of reliability and/or safety in functionality and/or accuracy such as transport equipment (aircraft, train, automobile, etc.), disaster-prevention/security equipment or various safety equipment, Purchaser shall consult TOPPAN PRINTING on such use in advance.
- This Product shall not be used for application which requires extremely higher level of reliability and/or safety such as aerospace equipment, telecommunication equipment for trunk lines, control equipment for nuclear facilities or life-support medical equipment.
- It must be noted as an mechanical design manner, especial attention in housing design to prevent arcuation/flexureor caused by stress to the LCD module shall be considered.
- TOPPAN PRINTING assumes no liability for any damage resulting from misuse, abuse, and/or miss-operation of the Product deviating from the operating conditions and precautions described in the Specification.
- O It shall be mutually conferred if nonconforming defect which result from unspecified cause in this specification arises.
- © If any issue arises as to information provided in this Specification or any other information, TOPPAN PRINTING and Purchaser shall discuss them in good faith and seek solution.
- TOPPAN PRINTING assumes no liability for defects such as electrostatic discharge failure occurred during peeling off the protective film or Purchaser's assembly process.

① This Product is compatible for RoHS directive.

Object substance	Maximum content [ppm]
Cadmium and its compound	100
Hexavalent Chromium Compound	1000
Lead & Lead compound	1000
Mercury & Mercury compound	1000
Polybrominated biphenyl series (PBB series)	1000
Polybrominated biphenyl ether series (PBDE series)	1000

#### 2. Outline Specifications


#### 2.1 Features of the Product

- 3.5 inch diagonal display, 1440 [H] x 640 [V] dots.
- 6-bit / 262,144 colors.
- Timing generator [TG], Counter-electrode driving circuitry, Built-in power supply circuit.
- Power save (Standby) mode capable.
- Long life & High bright white LED back-light.
- Blanview TFT-LCD, improved outdoor readability.

	Ind	oor	Out	door
	Readability	Power Efficiency (Battery Life)	Readability	Power Efficiency (Battery Life)
Transmissive	Good	Good	Fair	Poor
Transflective	Fair	Poor	Good	Good
Blanview	Good	Good	Good	Good

#### 2.2 Display Method


Items	Specifications	Remarks
Display type	VA 262,144 colors.	
	Blanview, Normally black.	
Driving method	a-Si TFT Active matrix.	
	Line-scanning, Non-interlace.	
Dot arrangement	RGB stripe arrangement.	Refer to "Dot arrangement"
Signal input method	6-bit RGB, parallel input.	
Backlight type	Long life & High bright white LED.	
NTSC ratio	50%	

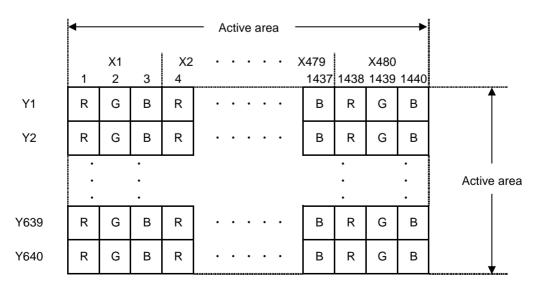

Dot arrangement (FPC cable placed left side)

#### <Features of Blanview>


- Backlight power consumption required to assure visibility. (equivalent to 3.5"QVGA)

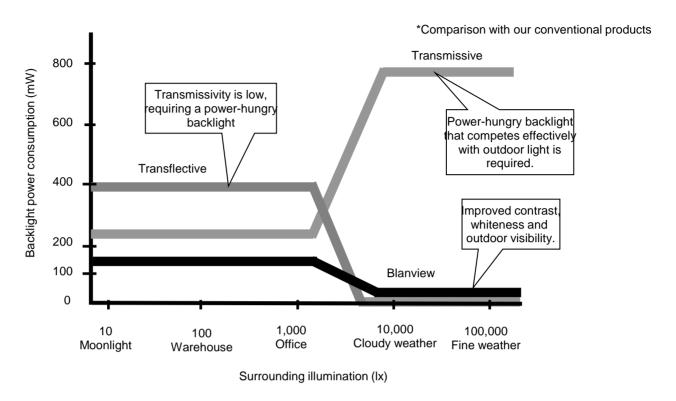

- Contrast characteristics under 100,000lx. (same condition as direct sunlight.)

With better contrast (higher contrast ratio), Blanview TFT-LCD has the best outdoor readability in three different types of TFT-LCD.

Below chart shows contrast value against panel surface brightness. (Horizontal: Panel surface brightness/ Vertical: Contrast value) LCD panel has enough outdoor readability above our Standard line. (TOPPAN PRINTING criteria)

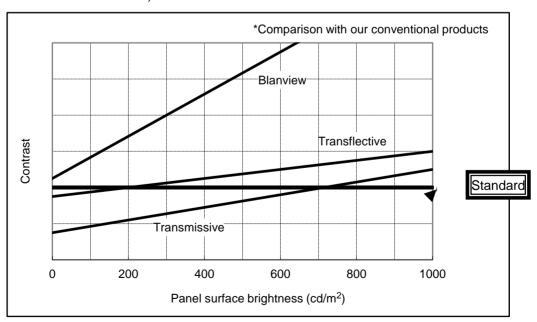


Issue:May.29,2019

#### 3. Dimensions and Shape

#### 3.1 Dimensions

Items	Specifications	Unit	Remarks
Outline dimensions	63.50[H] × 85.00[V] ×3.03[D]	mm	Exclude FPC cable and
			parts on FPC.
Active area	53.28[H] × 71.04[V]	mm	88.8mm diagonal
Number of dots	1440[H] × 640[V]	dot	
Dot pitch	37.00[H] × 111.00[V]	um	
Surface hardness of the polarizer	3	Н	Load:2.0N
Weight	30.8	g	Include FPC cable

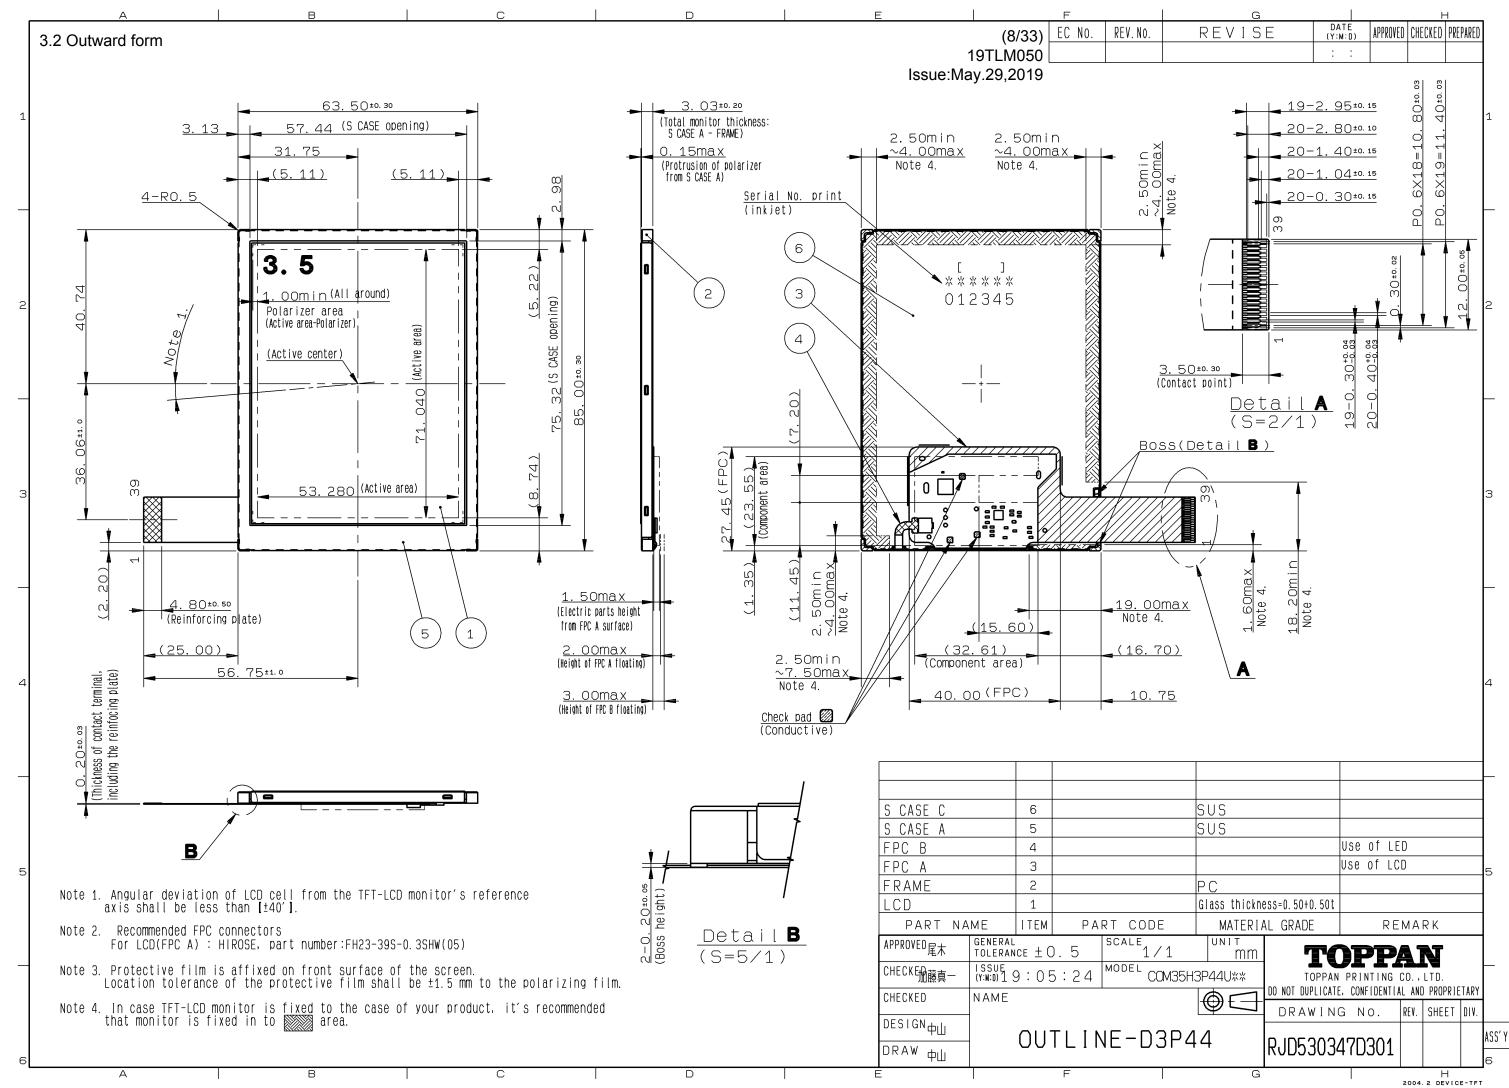

#### 3.3 Serial № print (S-print)

#### 1) Display Items

S-print indicates the least significant digit of manufacture year (1digit), manufacture month with below alphabet (1letter), model code (5characters), serial number (6digits).

\* Contents of Display

	Contents of display							
а	The least significant digit of manufacture year							
b	Manufacture month	nufacture month Jan-A May-E Sep-I						
		Feb-B Jun-F Oct-J						
		Mar-C	Jul-G	Nov-K				
		Apr-D	Aug-H	Dec-L				
С	Model code	35QBC (Made in Japan)						
		35QCC (Made in Malaysia)						
d	Serial number							

- \* Example of indication of Serial № print (S-print)
- ·Made in Japan

9J35QBC000125

means "manufactured in October 2019, 3.5" QB type, C specifications, serial number 000125"

·Made in Malaysia

9J35QCC000125

means "manufactured in October 2019, 3.5" QC type, C specifications, serial number 000125"

- 2) Location of Serial № print (S-print) Refer to 3.2 "Outward Form".
- 3)Others

Please note that it is likely to disappear with an organic solvent about the Serial print.


Issue:May.29,2019

#### SPECIFICATIONS № 19TLM050

#### 4. Pin Assignment

No.	Symbol	Function					
1	VSS	Ground					
2	VSS	Ground					
3	VDD	Power supply input.					
4	VCCIO	Logic Interface Power supply input.					
5	VSS	Ground					
6	RESETB	System reset signal input. (Lo: active)					
7	HSYNC	Horizontal sync signal input. (Negative polarity)					
8	VSYNC	Vertical sync signal input. (Negative polarity)					
9	CLK	Clock input for display. (Data Input on the falling edge)					
10	VSS	Ground					
11	D00	Display data input for (B).					
12	D01	00h for black display					
13	D02	D00:LSB D05:MSB					
14	D03						
15	D04	Driver IC carries out gamma conversion internally.					
16	D05						
17	D10	Display data input for (G).					
18	D11	00h for black display					
19	D12	D10:LSB D15:MSB					
20	D13						
21	D14	Driver IC carries out gamma conversion internally.					
22	D15						
23	D20	Display data input for (R).					
24	D21	00h for black display					
25	D22	D20:LSB D25:MSB					
26	D23						
27	D24	Driver IC carries out gamma conversion internally.					
28	D25						
29	VSS	Ground					
30	DE	Input data effective signal. (It is effective for the period of "H")					
31	STBYB	Standby signal (Lo:Standby operation,Hi:Normal operation)					
32	TEST1	Connect to Ground.					
33	NC	OPEN					
34	NC	OPEN					
35	NC	OPEN					
36	NC	OPEN					
37	TEST2	Connect to Ground.					
38	BLH	LED drive power source. (Anode side)					
39	BLL	LED drive power source. (Cathode side)					

- Recommended connector: HIROSE ELECTRIC FH23 series [FH23-39S-0.3SHW(05)]
- Please make sure to check a consistency between pin assignment in "3.2 Outward Form" and your connector pin assignment when designing your circuit.
   Inconsistency in input signal assignment may cause a malfunction.
- Since FPC cable has gold plated terminals, gilt finish contact shoe connector is recommended.

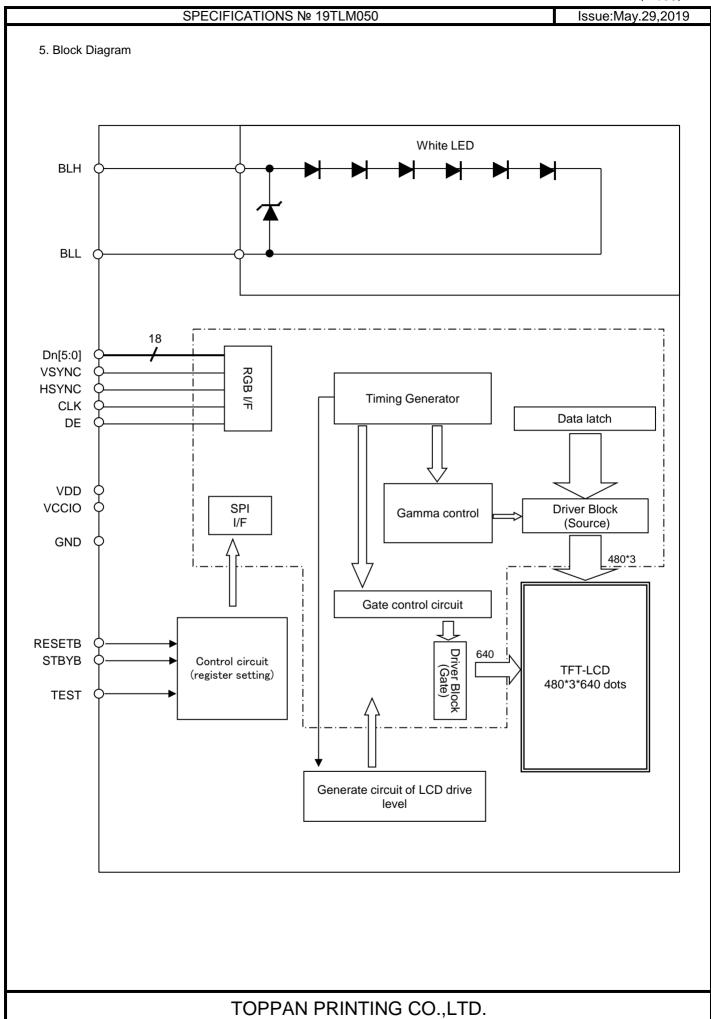

#### 6. Absolute Maximum Rating

VSS=0V

100-01							
Item	Symbol	Condition	Rating		Unit	Applicable terminal	
			MIN	MAX			
Supply voltage	VDD	Ta = 25 °C	-0.3	4.6	V	VDD	
Logic interface voltage	VCCIO	1	-0.3	VDD	V	VCCIO	
Input voltage for logic	VI		-0.3	VCCIO+0.3	V	CLK,VSYNC,HSYNC,DE D[05:00],D[15:10]	
						D[25:20],STBYB,RESETB	
Forward current	IL	Ta = 25 °C		35	mA	BLH-BLL	
		Ta = 70 °C		15			
Storage temperature range	Tstg		-30	80	°C		
Storage humidity range	Hstg	Non condensing in an environmental moisture at or less than 40 °C 90%RH.					


#### 7. Recommended Operating Conditions

VSS=0V

Item	Symbol	Condition		Rating			Applicable terminal
			MIN	TYP	MAX		
Supply voltage	VDD		2.7	3.0	3.6	V	VDD
Logic interface voltage	VCCIO	1	1.7	1.8	VDD	V	VCCIO
Input voltage for logic	VI		0		VCCIO	V	CLK,VSYNC,HSYNC DE,D[05:00],D[15:10] D[25:20],STBYB RESETB
Operational temperature range	Тор	Note1,2	-20	+25	+70	°C	Panel surface temperature
Operating humidity range	Нор	Ta<=30 °C	20		80	%	
		Ta>30 °C	Non condensing in an environmental moisture at or less than 30 °C 80%RH.				

Note1: This monitor is operatable in this temperature range. With regard to optical characteristics, refer to Item 10."CHARACTERISTICS".

Note 2: Acceptable Forward Current to LED is up to 15mA, when Ta=+70 °C. Do not exceed Allowable Forward Current shown on the chart below.

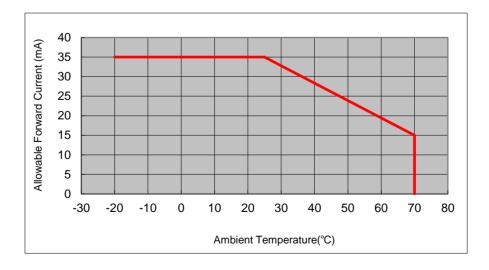

#### 8. Characteristics

#### 8.1 DC Characteristics

#### 8.1.1 Display Module

(Unless otherwise noted, Ta=25 °C, VDD=3.0V, VCCIO=1.8V, VSS=0V)

	0 1 1	0 11.1	1	D #			1 1 1 1 1
Item	Symbol	Condition		Rating		Unit	Applicable terminal
			MIN	TYP	MAX		
Input Signal	VIH	VCCIO=1.7~2.5V	0.7×VCCIO		VCCIO	V	CLK,VSYNC,HSYNC,
Voltage							DE,D[05:00],
	VIL		0		0.3×VCCIO	V	D[15:10],D[25:20],
							STBYB,RESETB
Operating	IDD	fCLK=19.8MHz		8.0	16.0	mA	VDD
Current	ICCIO	Color bar display		0.6	1.2	mA	VCCIO
Stand-by	IDDS	Other input with		5.0	15.0	uA	VDD
Current	ICCIOS	constant voltage			1.0	uA	VCCIO

#### 8.1.2 Backlight

Item	Symbol	Condition		Rating			Applicable terminal
			MIN	TYP	MAX		
Forward current	IL25	Ta=25 °C		10.0	35.0	mA	BLH — BLL
	IL70	Ta=70 °C		_	15.0	mA	
Forward voltage	VL	Ta=25 °C	_	16.3	17.2	V	
(Reference only)		IL=10.0mA					
Estimated Life	LL	Ta=25 °C	_	50,000	_	hr	
of LED		IL=10.0mA					
		Note					


Note: - The lifetime of the LED is defined as a period till the brightness of the LED decreases to the half of its initial value.

- This figure is given as a reference purpose only, and not as a guarantee.
- This figure is estimated for an LED operating alone.
   As the performance of an LED may differ when assembled as a monitor together with a TFT panel due to different environmental temperature.
- Estimated lifetime could vary on a different temperature and usually higher temperature could reduce the life significantly.

#### 7.2 AC Characteristics

(Unless otherwise noted, Ta=25 °C, VDD=3.0V, VCCIO=1.8V, VSS=0V)

(811000 0110111100 110104, 14-20 0,123-0.01,10010-1.01,100-01							
Item	Symbol	Condition		Rating		Unit	Applicable terminal
			MIN	TYP	MAX		
CLK frequency	fCLK		18	19.8	27	MHz	CLK
CLK Low period	tw1L	0.3xVCCIO or less	10			ns	
CLK High period	tw1H	0.7×VCCIO or more	10			ns	
Setup time	tsp		10			ns	CLK,VSYNC,
							HSYNC,DE,
Hold time	thd		10			ns	D[05:00],D[15:10]
							D[25:20]

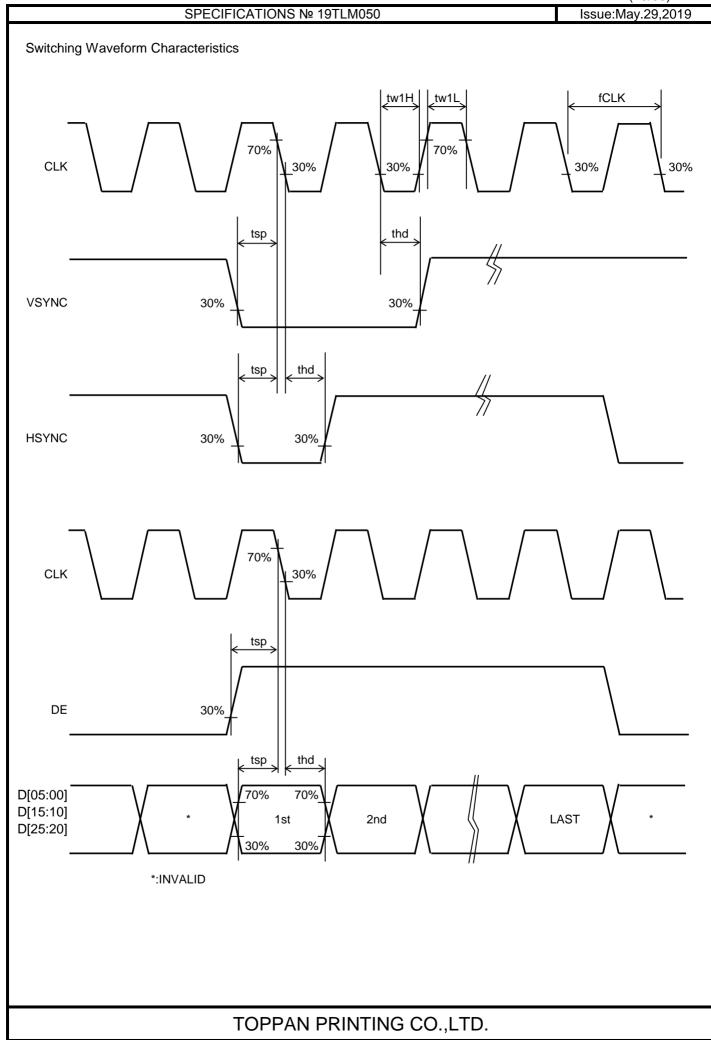


#### 8.3 Input Timing Characteristics

Item	Symbol		Rating		Unit	Applicable terminal
		MIN	TYP	MAX		
CLK Frequency	fCLK	18	19.8	27	MHz	CLK
VSYNC Frequency Note	fVSYNC	54	60	66	Hz	VSYNC
VSYNC Cycle	tv	646	650	700	Н	VSYNC,HSYNC
VSYNC Pulse Width	tw4H	2	3	50	Н	
Vertical Back Porch	tvb	2	3	50	Н	VSYNC,HSYNC,DE,
Vertical Front Porch	t∨f	2	4	50	Н	D[05:00],D[15:10],D[25:20]
Vertical Display Period	tvdp		640		Н	
HSYNC frequency	fHSYNC		39.0	50.0	kHz	HSYNC
HSYNC Cycle	th	504	508	630	CLK	CLK,HSYNC
HSYNC Pulse Width	tw5H	5	10	140	CLK	
Horizontal Back Porch	thb	5	10	140	CLK	CLK,HSYNC,DE,
Horizontal Front Porch	thf	5	8	140	CLK	D[05:00],D[15:10],D[25:20]
Horizontal data start Point	tw5H+thb	19		145	CLK	
Horizontal Blanking Period	tw5H+thb+thf	24		150	CLK	
DE Pulse Width	tw6H		480		CLK	CLK,DE
Horizontal Display Period	thdp		480		CLK	CLK,DE,
						D[05:00],D[15:10],D[25:20]

Note: This is recommended spec to get high quality picture on display. It is customer's risk to use out of this frequency.

TOPPAN PRINTING CO.,LTD.

SPECIFICATIONS № 19TLM050 Issue:May.29,2019 8.5 Example of Driving Timing Chart (fCLK=19.8MHz) -Vertical Timing 650 H 3 H **VSYNC HSYNC** 640 H 3 H 4 H DE D[05:00] D[15:10] D[25:20] -Horizontal Timing 508CLK 10CLK **HSYNC** արտափություսնում CLK 480CLK 8CLK 10CLK DE 10CLK 480CLK 8CLK D[05:00] D[15:10] D[25:20] TOPPAN PRINTING CO.,LTD.

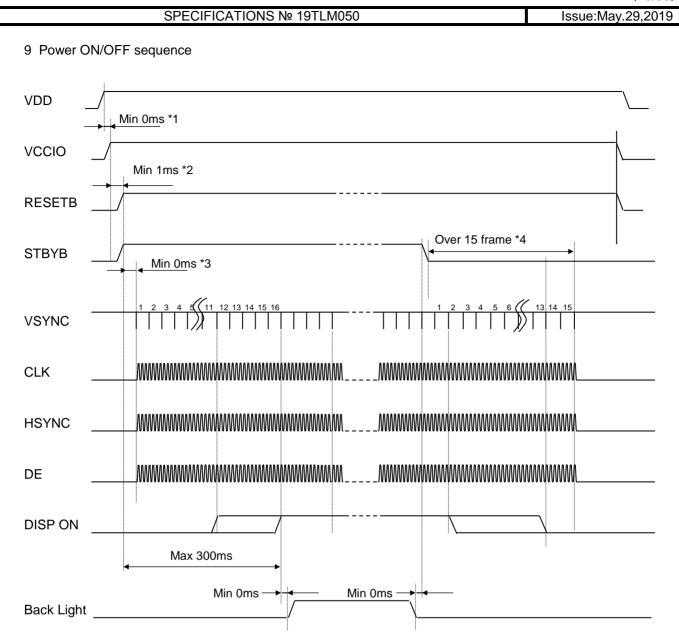

- \*1 Please start up VDD and VCCIO at the same time or in order of VDD --> VCCIO.
- \*2 After the power supply, Please execute RESETB.
- \*3 There is no regulations at time until each signal is supplied from RESETB"H" But meanwhile, It is necessary to fix each signal to "H"or"L".
- \*4 It is necessary to supply VSYNC and CLK for 15 frames or more from STBYB "L" to turning off the power supply without leaving the afterimage.

#### 10. Characteristics

#### 10.1 Optical Characteristics

< Measurement Condition >

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200 (OTSUKA ELECTRONICS),

EZcontrast160D(ELDIM)


Driving condition: VDD=3.0V, VCCIO=1.8V, VSS=0V

Optimized VCOMDC

Backlight: IL=10.0mA Measured temperature: Ta=25°C

	Item	Symbol	Condition	MIN	TYP	MAX	Unit	Note No.	Remark
Response time	Rise time	TON	[Data]= 00h→3Fh	_	_	40	ms	1	
Resp	Fall time	TOFF	[Data]= 3Fh→00h	_		60	ms		
Contrast ratio	Backlight ON	CR	[Data]= 3Fh / 00h	480	800	ı		2	
Con	Backlight OFF			_	2.6	ı			
D	Left	θL	[Data]=	80	_	1	deg	3	
Viewing angle	Right	θR	3Fh / 00h	80	_	_	deg		
Vie,	Up	φU	CR≧10	80		_	deg		
	Down	φD		80	_	_	deg		
White	e Chromaticity	Х		White chromaticity range				4	
••••	- Childhadany	У							
Burn-in			be ob	ceable bu served a ndow pat	fter 2 ho	urs of	5		
Center brightness			[Data]=3Fh	230	330	_	cd/m <sup>2</sup>	6	
Brightness distribution		on	[Data]=3Fh	70	_	_	%	7	

<sup>\*</sup> Note number 1 to 7: Refer to the APPENDIX of "Reference Method for Measuring Optical Characteristics".

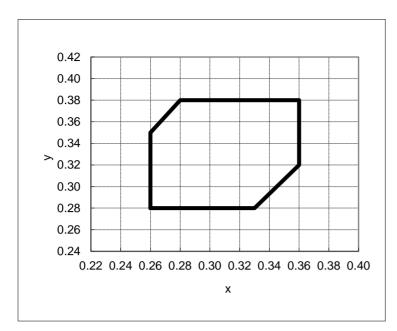

[White Chromaticity Range]

Х	у
0.26	0.28
0.33	0.28
0.36	0.32
0.36	0.38
0.28	0.38
0.26	0.35

White Chromaticity Range

#### 10.2 Temperature Characteristics

< Measurement Condition >

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200(OTSUKA ELECTRONICS)

Driving condition: VDD=3.0V,VCCIO=1.8V, VSS=0V

Optimized VCOMDC

Backlight: IL=10.0mA

Item			Specif	Remark	
			Ta=-20°C	Ta=70°C	
Contrast	ratio	CR	200 or more	200 or more	Backlight ON
Response time	Rise time	TON	200 msec or less	30 msec or less	
	Fall time	TOFF	300 msec or less	50 msec or less	
		No noticeable display of should be observed.			

#### 11. Criteria of Judgment


#### 11.1 Defective Display and Screen Quality

Test Condition: Observed TFT-LCD monitor from front during operation

with the following conditions

Driving Signal Raster Patter (RGB, white, black)
Signal condition [Data]:00h, 25h, 3Fh (3steps)

Observation distance 30 cm
Illuminance 200 to 350 lx
Backlight IL=10.0mA




	efect item		Defect content	Criteria
	Line defect	Black, white or color	line, 3 or more neighboring defective dots	Not exists
Display Quality	Dot defect	TFT or CF, or dust is (brighter dot, darker High bright dot: Visil Low bright dot: Visil Dark dot: Appear da	on dot-by-dot base due to defective s counted as dot defect dot) ole through 2% ND filter at [Data]=00h ole through 5% ND filter at [Data]=25h on ND filter at [Data]=25h on ND filter at [Data]=00h	Refer to table 1  Acceptable
	Dirt		white stain, black stain etc)	Invisible through 5% ND filter at Black screen. Invisible through 1% ND filter at other screen.
ity		Point-like	0.25mm< φ	N=0
Quality	Caraign		0.20mm< φ ≦0.25mm	N≦2
n G	Foreign particle		φ ≦0.20mm	Acceptable
Screen	particle	Liner	3.0mm <length 0.08mm<width<="" and="" td=""><td>N=0</td></length>	N=0
Sc			length≦3.0mm or width≦0.08mm	Acceptable
	Others			Use boundary sample for judgment when necessary

 $\phi$ (mm): Average diameter = (major axis + minor axis)/2 Permissible number: N

#### Table 1

Area	High bright dot	Low bright dot	Dark dot	Total	Criteria
А	0	2	2	3	Permissible distance between same color bright dots (includes neighboring dots): 3 mm or more
В	2	4	4	6	Permissible distance between same color high bright dots (includes neighboring dots): 5 mm or more
Total	2	4	4	7	

#### <Portrait model>



Division of A and B areas

B area: Active area

Dimensional ratio between A and B areas: 1: 4: 1

(Refer to the left figure)

Issue:May.29,2019

11.2 Screen and Other Appearance

Testing conditions

Observation distance 30cm


Illuminance 1200~2000 lx

	Item	Criteria	Remark
Polarizer	Flaw Stain Bubble Dust Dent	Ignore invisible defect when the backlight is on.	Applicable area: Active area only (Refer to the section 3.2 "Outward form")
S-cas	se	No functional defect occurs	
FPC	cable	No functional defect occurs	

#### 12. Reliability Test

	Test item	Test condition	number of failures /number of examinations
	High temperature storage	Ta=80° C 240hrs	0/3
	Low temperature storage	Ta=-30° C 240hrs	0/3
	High temperature & high	Ta=60° C, RH=90% 240hrs	0/3
	humidity storage	non condensing **	
Durability test	High temperature operation	Tp=70° C 240hrs	0/3
ity	Low temperature operation	Tp=-20° C 240hrs	0/3
abil	High temp & humid operation	Tp=40°C, RH=90% 240hrs	0/3
Jur	High temp & humid operation	non condensing **	
	Thermal shock storage	-30←→80° C(30min/30min) 100 cycles	0/3
		Xenon Blackpanel 63±3°C non-shower	0/3
	Lightfastness	450W/m2(300~700nm) non-operating	
		Integral dose 800MJ/m2	
		Confirms to EIAJ ED-4701/300	0/3
	Electrostatic discharge test	C=200pF,R=0Ω,V=±200V	
est	(Non operation)	Each 3 times of discharge on and power supply	
al te		and other terminals.	
Mechanical environmental test	Surface discharge test	C=250pF, R=100Ω, V=±12kV	0/3
E L	(Non operation)	Each 5 times of discharge in both polarities	
iro	(Non operation)	on the center of screen with the case grounded.	
en	Vibration test	Total amplitude 1.5mm, f=10~55Hz, X,Y,Z	0/3
cal	Vibration test	directions for each 2 hours	
ani		Use TOPPAN PRINTING original jig	0/3
əch		(see next page)and make an impact with	
ž	Impact test	peak acceleration of 1000m/s2 for 6 msec with	
		half sine-curve at 3 times to each X, Y, Z directions	
		in conformance with JIS C 60068-2-27-2011.	
st		Acceleration of 19.6m/s <sup>2</sup> with frequency of	0/1 Packing
) te	Packing vibration-proof test	10→55→10Hz, X,Y, Zdirection for each	
king		30 minutes	
Packing test	Packing drop test	Drop from 75cm high.	0/1 Packing
ц	. doming drop toot	1 time to each 6 surfaces, 3 edges, 1 corner	

% The profile of high temperature/humidity storage and High Temperature/humidity operation (Pure water of over 10M $\Omega$ ·cm shall be used.)

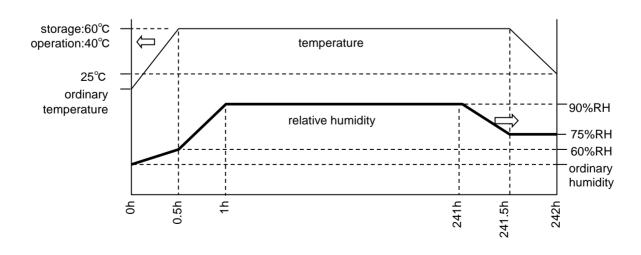


Issue:May.29,2019

#### Table2.Reliability Criteria


The parameters should be measured after leaving the monitor at the ordinary temperature for 24 hours or more after the test completion.

	•	
item	Standard	Remarks
Display quality	No visible abnormality shall be seen.	
	(Except for unevenness by Pol deterioration.)	
Contrast ratio	200 or more	Backlight ON

#### **TOPPAN PRINTING Original Jig**

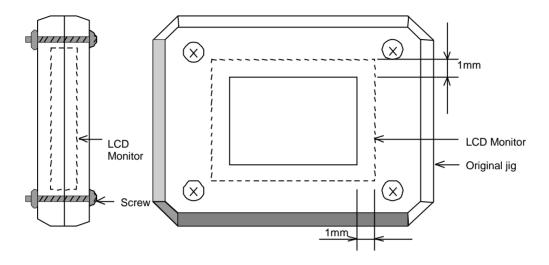

#### 13. Packing Specifications

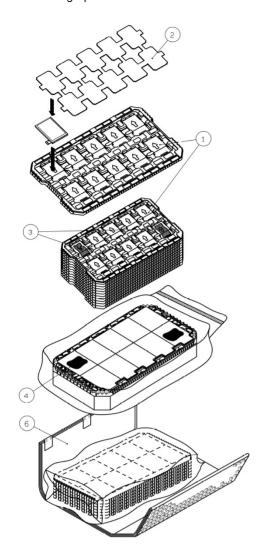

- Step 1. Each product is to be placed in one of the cut-outs of the tray with the display surface facing upward.


  Foam sheet A are to be placed on the products in the tray.

  (10 products per tray)
- Step 2. Each tray is to be piled up in same orientation and the trays be in a stack of 10.

  One empty tray is to be put on the top of stack of 10 trays.
- Step 3. 2 packs of moisture absorbers are to be placed on the top tray as shown in the drawing.Put piled trays into a sealing bag.
- Step 4. Vacuum and seal the sealing bag with the vacuum sealing machine.
- Step 5. The stack of trays in the plastic back is to be wrapped with B SHEET A.
- Step 6. The wrapped trays are placed in the carton.
- Step 7. B SHEET B are to be inserted into a outer carton with same orientation.

  The outer carton is to be sealed in H-shape with packing tape as shown in the drawing.
- Step 8. The model number, quantity of products, and shipping date are to be printed on the outer carton.

  If necessary, shipping labels or impression markings are to be put on the outer carton.

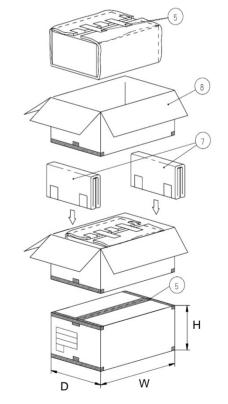

Remark: The return of packing materials is not required.

Packing item name		Specs., Material	
1	Tray	A-PET	
2	FOAM SHEET	Anti-static polyethylene	
3	Drier	Moisture absorber	
4	Sealing bag		
(5)	Packing tape		
6	B SHEET A	Anti-static air babble sheet	
7	B SHEET B	Anti-static air babble sheet	
8	Outer carton	Corrugated cardboard	

Dimension of outer carton				
D : Approx.	( 356mm )			
W : Approx.	( 664mm )			
H : Approx.	( 182mm )			
Quantity of products packed in one carton: 100				
Gross weight : Approx.	6.1 Kg			

#### 14. Handling Instruction

14.1 Cautions for Handling LCD panels



#### Caution

- (1) Do not make an impact on the LCD panel glass because it may break and you may get injured from it.
- (2) If the glass breaks, do not touch it with bare hands.
  (Fragment of broken glass may stick you or you cut yourself on it.
- (3) If you get injured, receive adequate first aid and consult a medial doctor.
- (4) Do not let liquid crystal get into your mouth.
  (If the LCD panel glass breaks, try not let liquid crystal get into your mouth even toxic property of liquid crystal has not been confirmed.)
- (5) If liquid crystal adheres, rinse it out thoroughly.
  (If liquid crystal adheres to your cloth or skin, wipe it off with rubbing alcohol or wash it thoroughly with soap. If liquid crystal gets into eyes, rinse it with clean water for at least 15 minutes and consult an eye doctor.
- (6) If you scrap this products, follow a disposal standard of industrial waste that is legally valid in the community, country or territory where you reside.
- (7) Do not connect or disconnect this product while its application products is powered on.
- (8) Do not attempt to disassemble or modify this product as it is precision component.
- (9) If a part of soldering part has been exposed, and avoid contact (short-circuit) with a metallic part of the case etc. about FPC of this model, please. Please insulate it with the insulating tape etc. if necessary. The defective operation is caused, and there is a possibility to generation of heat and the ignition.
- (10) Since excess current protection circuit is not built in this TFT module, there is the possibility that LCD module or peripheral circuit become feverish and burned in case abnormal operation is generated. We recommend you to add excess current protection circuit to power supply.
- (11) The devices on the FPC are damageable to electrostatic discharge, because the terminals of the devices are exposed.
  Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors.
  Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.



Caution

This mark is used to indicate a precaution or an instruction which, if not correctly observed, may result in bodily injury, or material damages alone.

Issue:May.29,2019

#### SPECIFICATIONS № 19TLM050

#### 14.2 Precautions for Handling

- Wear finger tips at incoming inspection and for handling the TFT monitors to keep display quality and keep the working area clean.
   Do not touch the surface of the monitor as it is easily scratched.
- Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors as the LED in this TFT monitors is damageable to electrostatic discharge. Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.
- Avoid strong mechanical shock including knocking, hitting or dropping to the TFT monitors for protecting their glass parts. Do not use the TFT monitors that have been experienced dropping or strong mechanical shock.
- 4) Do not use or storage the TFT monitors at high temperature and high humidity environment.

  Particularly, never use or storage the TFT monitors at a location where condensation builds up.
- 5) Avoid using and storing TFT monitors at a location where they are exposed to direct sunlight or ultraviolet rays to prevent the LCD panels from deterioration by ultraviolet rays.
- 6) Do not stain or damage the contacts of the FPC cable . FPC cable needs to be inserted until it can reach to the end of connector slot. During insertion, make sure to keep the cable in a horizontal position to avoid an oblique insertion. Otherwise, it may cause poor contact or deteriorate reliability of the FPC cable.
- 7) The FPC cable is a design very weak to the bend and the pull as it is fixed with the tape. Do not bend or pull the FPC cable or carry the TFT monitor by holding the FPC cable.
- 8) Peel off the protective film on the TFT monitors during mounting process. Refer to the section 14.5 on how to peel off the protective film. We are not responsible for electrostatic discharge failures or other defects occur when peeling off the protective film.

#### 14.3 Precautions for Operation

- 1) Since this TFT monitors are not equipped with light shielding for the driver IC, do not expose the driver IC to strong lights during operation as it may cause functional failures.
- In case of powering up or powering off this LCD module,
   be sure to comply the sequence as instructed in this specification.
- Do not plug in or out the FPC cable while power supply is switch on.
   Plug the FPC cable in and out while power supply is switched off.
- 4) Do not operate the TFT monitors in the strong magnetic field. It may break the TFT monitors.
- 5) Do not display a fixed image on the screen for a long time. Use a screen-saver or other measures to avoid a fixed image displayed on the screen for a long time. Otherwise, it may cause burn-in image on the screen due the characteristics of liquid crystal.

#### 14.4 Storage Condition for Shipping Cartons

#### Storage environment

Temperature 0 to 40°C
Humidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period 1 year

Unpacking
 To prevent damages caused by static electricity, anti-static precautionary measures

(e.g. earthing, anti-static mat) should be implemented. After unpack, keep product in the appropriate condition,

otherwise bubble seal of Protective film may be printed on Polarizer.

Maximum piling up 7 cartons

#### \*Conditions to storage after unpacking

#### Storage environment

Temperature 0 to 40°CHumidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period
 1 year (Shelf life)

Others Keep/ store away from direct sunlight

Storage goods on original tray made by ORTUS.

#### 14.5 Precautions for Peeling off the Protective film

The followings work environment and work method are recommended to prevent the TFT monitors from static damage or adhesion of dust when peeling off the protective films.

#### A) Work Environment


- a) Humidity: 50 to 70 %RH, Temperature15 to 27°C
- b) Operators should wear conductive shoes, conductive clothes, conductive finger tips and grounded wrist-straps.

  Use an electrostatic neutralization blower.
  - Anti-static treatment should be implemented to work area's floor.
- c) Use a room shielded against outside dust with sticky floor mat laid at the entrance to eliminate dirt.

#### B) Work Method

The following procedures should taken to prevent the driver ICs from charging and discharging.

- a) Use an electrostatic neutralization blower to blow air on the TFT monitors to its lower when FPC case is placed at the bottom.
   Optimize direction of the blowing air and the distance between the TFT monitors.
  - Optimize direction of the blowing air and the distance between the TFT monitors and the electrostatic neutralization blower.
- b) Put an adhesive tape (Scotch tape, etc) at the lower left corner area of the protective film to prevent scratch on surface of TFT monitors.
- c) Peel off the adhesive tape slowly (spending more than 2 secs to complete) by pulling it to opposite direction.

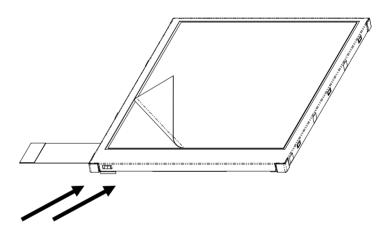

Blower wind direction (Set an ion blower with its adequate conditions.)

#### 14.6 Warranty

TOPPAN PRINTING is only liable to defective goods which is stored and used under the condition complying with this specifications and returned within 1 (one) year.

Warranty caused by manufacturing defect shall be conducted by replacement of goods or refundment at unit price.

#### **APPENDIX**

Reference Method for Measuring Optical Characteristics and Performance

#### 1. Measurement Condition (Backlight ON)


Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200(OTSUKA ELECTRONICS), EZcontrast160D (ELDIM)

Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified

Measurement system: See the chart below. The luminance meter is placed on the normal line of measurement system.

Measurement point: At the center of the screen unless otherwise specified

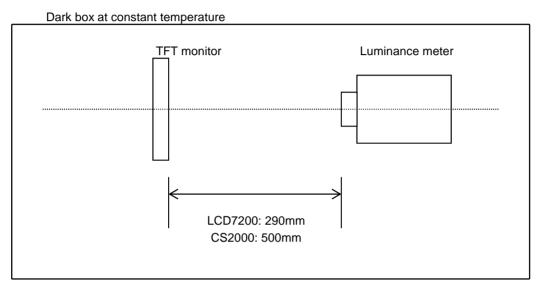


Measurement is made after 30 minutes of lighting of the backlight.

Measurement point: At the center point of the screen

Brightness distribution: 9 points shown in the following drawing.

#### <Portrait model>



Dimensional ratio of active area


Backlight IL=10.0mA

Measurement Condition (Contrast ratio Backlight OFF only)

Measuring instruments: LCD7200(OTSUKA ELECTRONICS),Ring Light(40,000 lx,φ58)

Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified
Measurement system: See the chart below.
Measurement point: At the center of the screen.

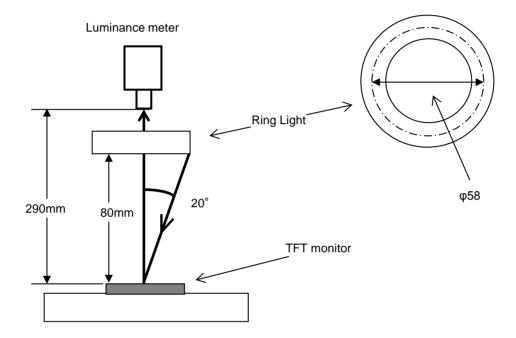

Issue:May.29,2019

Notice	Item	Test method	Measuring instrument	Remark
	Response time	Measure output signal waves with a brightness meter when the raster or window pattern is changed over from white to black and from black to white	LCD7200	Black display [Data]=00h White display [Data]=3Fh
		Black White Black		TON Rise time
		White brightness		
		90%		TOFF Fall time
		10%		
		0%  Black brightness  TON  TOFF		
2	Contrast ratio	Measure maximum luminance Y1([Data]=3Fh) and	CS2000	Backlight ON
_		minimum luminance Y2([Data]=00h) at the center of	LCD7200	Backlight OF
		the screen by displaying raster or window pattern.		
		Then calculate the ratio between these two values.		
		Contrast ratio = Y1/Y2		
		Diameter of measuring point: 7.8mmφ(CS2000)		
		Diameter of measuring point: 3mmφ(LCD7200)		
3	Viewing	Move the luminance meter from right to left and up	EZcontrast160D	
	angle	and down and determine the angles where		
ļ	Horizontalθ	contrast ratio is 10.		
4	Verticalφ	Measure chromaticity coordinates x and y of CIE1931	000000	
4	White chromaticity	colorimetric system at [Data] = 3Fh	CS2000	
	Chilomaticity	Color matching function: 1°view		
5	Burn-in	Visually check burn-in image on the screen		At optimized
		after 2 hours of "window display" ([Data]=00h/3Fh).		VCOMDC
6	Center brightness	Measure the brightness at the center of the screen.	CS2000	
7	Brightness	(Brightness distribution) = 100 x B/A %	CS2000	
	distribution	A : max. brightness of the 9 points		
		B : min. brightness of the 9 points		



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany

FORTEC

**FORTEC Elektronik AG** 

Augsburger Str. 2b 82110 Germering

 Phone:
 +49 89 894363-0

 E-Mail:
 sales@fortecag.de

 Internet:
 www.fortecag.de

**Fortec Group Members** 

Austria

FORTEC

FORTEC Flektronik AG

Office Vienna Nuschinggasse 12 1230 Wien

 Phone:
 +43 1 8673492-0

 E-Mail:
 office@fortec.at

 Internet:
 www.fortec.at

Germany



**O**DISTEC

Distec GmbH

Augsburger Str. 2b 82110 Germering

Phone: +49 89 894363-0
E-Mail: <u>info@distec.de</u>
Internet: <u>www.distec.de</u>

FORTEC

FORTEC Elektronik AG

Lechwiesenstraße 9 86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Switzerland



ALTRAC

A FORTEC GROUP MEMBER

ALTRAC AG

Bahnhofstraße 3 5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

**United Kingdom** 



DISPLAY TECHNOLOGY Display Technology Ltd.

Osprey House, 1 Osprey Court Hichingbrooke Business Park Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600

E-Mail: <u>info@displaytechnology.co.uk</u>
Internet: <u>www. displaytechnology.co.uk</u>

USA



APOLLO DISPLAY TECHNOLOGIES

A FORTEC GROUP MEMBER

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1Ronkonkoma, NY 11779

Phone: +1 631 5804360
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com